



# FLDM

Compact LED Flood Light

FLDM	-	LV	-	90D	-	-	-	
	Wattage	Voltage		Optic		CCT	Mounting	Options
	15W = 15W / 1,667lm	LV = 120-277 VAC		90D = 90° x 120°		40K = 4000K	U = U-Bracket S = Slip-Fit Adaptor	
	30W = 30W / 3,718lm					50K = 5000K		
	50W = 50W / 6,179lm							

## OPERATION

Array Lifetime	100,000+ Hours
Driver Lifetime	50,000 Hours
Voltage	120 - 277 VAC
Operating Temperature	-40°C to 50°C
Optimal Temperature	-40°C to 35°C
Power Factor	> 0.93
Frequency	50/60 Hz
Colour Rendering Index	>80

## CERTIFICATIONS

Locations	Suitable for wet or dry locations
CSA Standards	CSA C22.2 No.250.0-08
UL Standards	UL 1598 (Edition 3) UL 8750 (Edition 1): 2009


## CONSTRUCTION

Housing	Powder Coated Cast Aluminum
Lens	Polycarbonate
Enclosure Rating	IP65
Dimensions (L x H x D) [mm]	15W: 115 x 82 x 80 - 0.6 kg 30W: 180 x 130 x 87 - 1.3 kg 50W: 227 x 154 x 95 - 1.8 kg

15W



30W

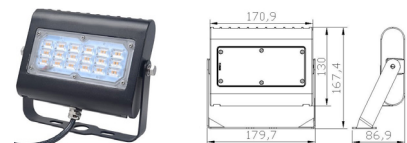

50W

