

BLU2

Universal LED Bay Light



BLU2	UV	Optic	CCT	Mounting	Options
Wattage (Adjustable) 80-150 80W-100W-150W 16,000lm - 24,000lm 200-300 200W-240W-300W 32,000lm - 48,000lm	Voltage UV = 100-347 VAC	60D = 60° 90D = 90° 120D = 120°	40K = 4000K 50K = 5000K 57K = 5700K	H = Hook Mount U = U-Bracket	D = Dimming O = Occ. Sensor WG = Wire Guard

OPERATION

Array Lifetime	100,000+ Hours
Driver Lifetime	50,000 Hours
Voltage	120 - 347 VAC
Operating Temperature	-40°C to 50°C
Optimal Temperature	-30°C to 35°C
Power Factor	> 0.95
Frequency	50/60 Hz
Colour Rendering Index	>70


CERTIFICATIONS

Locations	Suitable for wet or dry locations
CSA Standards	CSA C22.2 No.250.0-08
UL Standards	UL 1598 (Edition 3) UL 8750 (Edition 1): 2009

CONSTRUCTION

Housing	Cast Aluminum
Lens	Polycarbonate
Enclosure Rating	IP65
Dimensions (Diameter x H)	80-150: ø 280 mm x 113 mm 200-300: ø 350 mm x 123 mm
Weight	80-150: 2.5 kg 200-300: 3.5 kg

80W-150W

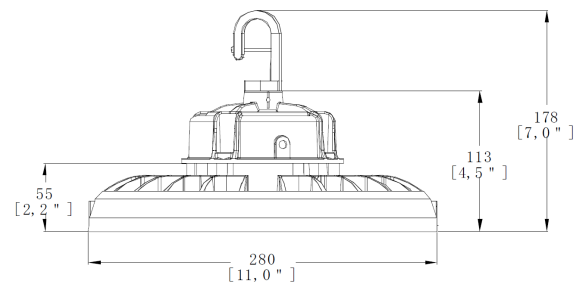

200W-300W

